



The Right Connection®

Data Sheet

Aluminum Hydrant Gate Valves


The hydrant gate valve is used to throttle the flow from a hydrant without damaging the hydrant itself.



AHGV250F-I

Female NST x Male NST

- 2½" female inlet x 2½" male outlet
- non-rising stem
- pin lug swivel
- cast aluminum speed handle
- body painted red
- chrome plated brass wedge and stem
- hard coated aluminum
- working pressure: 175 psi
- alloy: A356 with T6 temper
- replacement handle: HGV250-H

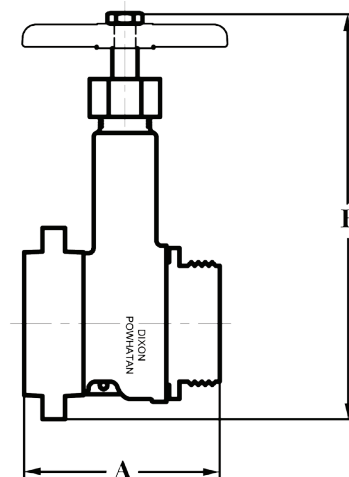

A	B	Weight in lbs.
4.9"	10.1"	3.75

Dixon Fire

ph: 410.778.2008 • 877.712.6179

fx: 410.778.4702 • 800.283.4966

dixonvalve.com