

Yellow Brass, as it is commonly known, is among the highest zinc-containing brasses available to designers. Exhibiting a handsome yellow color associated with brasses this alloy finds use in many of the same applications as other high brasses. C268 offers similar mechanical and physical properties to that of other brasses and is often found in applications requiring an economical copper-based alloy. Designers considering applications requiring a material capable of heavy deep drawing should consider alloy C260. For more information contact Olin Brass Market Development Engineering at 618-258-5255, OlinBrass.com or email us at info@olinbrass.com.

Chemical Composition	
Copper <sup>1</sup>	64.0-68.5%
Zinc	Remainder
Lead	0.09% Max
Iron	0.05% Max

<sup>1</sup> Copper plus named elements, 99.7% min

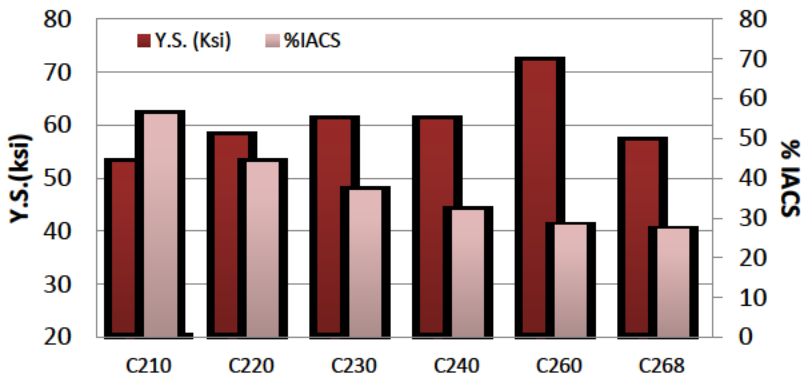


Figure 1: Comparison of Yield Strength and Electrical Conductivity performance of select Hard temper brass materials.

### Physical Properties

	English Units	Metric Units
Density	0.306 lb/in <sup>3</sup> @ 68°F	8.47 g/cm <sup>3</sup>
Thermal Conductivity	67 BTU-ft/ft <sup>2</sup> -hr-°F	116 W/mK
Electrical Resistivity	38.4 ohm circ mils/ft	6.39 microhm-cm
Electrical Conductivity (annealed)	27 % IACS*	0.157 megamho/cm
Modulus of Elasticity	15,000,000 psi	105 kN/mm <sup>2</sup>
Coeff. Of Thermal Expansion	11.3 PPM/°F	20.3 PPM/°C

\*International Annealed Copper Standard

### Mechanical Properties

Temper <sup>1</sup>	Tensile Strength		Yield Strength		% Elongation <sup>2</sup>	Typical 90° Bend Formability GW/BW <sup>3</sup>	
	ksi	N/mm <sup>2</sup>	ksi	N/mm <sup>2</sup>			
Annealed (Soft) <sup>4</sup>	44-61	305-420	23	160	52	-	-
1/4 Hard	49-59	340-405	34	235	42	-	-
1/2 Hard	55-65	380-450	44	305	36	0.3	0.5
3/4 Hard	62-72	425-495	53	365	25	0.5	1.0
Hard	68-78	470-540	57	395	19	1.0	1.5
Extra Hard	79-89	545-615	67	460	7	1.5	2.3
Spring	86-95	595-655	71	490	5	2.0	4.5
Extra Spring	90-99	620-685	73	505	5 max		

<sup>1</sup> Mechanical properties subject to change. All rolled- tempers are accepted or rejected based on Tensile Strength.

<sup>2</sup> Nominal Values in 2" (51mm)

<sup>3</sup> DATA FOR REFERENCE ONLY. R/T = Bend Radius/Material Thickness <0.016" (0.4mm) thick, 11/16 (17.5mm) wide.

<sup>4</sup> Annealed temper are manufactured to a grain size only, consult mill for additional info.

#### Olin Brass Headquarters

4801 Olympia Park  
Plaza, Suite 3500  
Louisville, KY 40241  
Ph: 502-873-3000

#### GBC METALS ASIA PACIFIC PTE LTD

1 Kim Seng Promenade  
Great World City, E Tower  
Singapore 237994  
Ph: 65.6238.1155

#### GBC METALS LLC SHANGHAI

Room 2004 Aetna Tower  
No. 107 Zunyi Rd  
Shanghai 200051 China  
Ph: 86.21.6237.5898

**OLIN BRASS-HEADQUARTERS**

4801 Olympia Park  
Plaza, Suite 3500  
Louisville, KY 40241  
Ph: 502-873-3000

**OLIN BRASS - MILL**

285 Lewis & Clark Blvd.  
East Alton, IL 62024  
Ph: 618-258-5255

**BRYAN METALS INC.**

1103 South Main Street  
Bryan OH 43506-0487  
Ph: 419-636-4571  
Fx: 419-636-3994

**SOMERS THIN STRIP**

215 Piedmont Street  
Waterbury, CT 06706  
Ph: 203-597-5000  
Fx: 203-597-5081

**A.J. OSTER COMPANY**

180 ALEXANDRA WAY  
Carol Stream, IL 60188-2068  
Ph: 630-260-1040  
Ph: 800-323-9644  
Fx: 630-260-1102

**A.J. OSTER CARIBE, INC.**

Centro industrial Rio Canas  
Lote 29, P.M.B HC-01  
Box 29030  
Caguas, PR 00725  
Ph: 787-747-7575

**A.J. OSTER FOILS, INC.**

2081 McCrea Street  
Alliance, OH 44601-2793  
Ph: 330-823-1700  
Ph: 800-321-9750  
Fx: 330-823-1705

**A.J. OSTER WEST INC.**

22833 La Palma Avenue  
Yorba Linda, CA 92887-4767  
Ph: 714-692-1000  
Ph: 800-933-5933  
Fx: 714-692-1225

**A.J. OSTER COMPANY**

457 Industrial Drive  
Warwick, RI 02886  
Ph: 401-739-0800  
Fx: 401-739-1276

**INTERNATIONAL SALES OFFICES & FACILITIES****GBC METALS ASIA PACIFIC PTE LTD.**

1 Kim Seng Road Promenade  
Great World City, East Tower #13-04  
Singapore 237994  
Ph: 65.6238.1155  
Fx: 65.6238.0660

**GBC METALS LLC SHANGHAI**

Room 2004, Aetna Tower  
No. 107 Zunyi Road  
Shanghai 200051, China  
Ph: 86.21.6237.5898  
Fx: 86.21.6237.5805

**OLIN LUOTONG METALS (GZ) Co Ltd**

No. 8 Jung Gong Road, East District  
Guangzhou Economic Technological & Dev District  
Guangzhou, P.R. China 510530  
Ph: 86.20.8226.6818  
Fx: 86.20.8226.6718

**DOWA-OLIN METAL CORPORATION**

2630, Shingai  
Iwata-shi, Shiznoka-ken  
438, Japan  
Ph: 81.538.37.5111  
Fx: 81.538.37.0147

**OLIN BRASS - INTERNATIONAL DISTRIBUTORS****UNITED KINGDOM / IRELAND****Aurubis UK Ltd.**

Rabone Park, Smethwick  
West Midlands B66 2NN  
England  
Ph: 44 (0) 121 555 1199  
Fx: 44 (0) 121 555 1188  
Email: [info-uk@aurubis.com](mailto:info-uk@aurubis.com)  
Website: [www.aurubis.com](http://www.aurubis.com)

**EUROPE****Walter Türkis GmbH**

Struthstrasse 35  
55743 Idar-Oberstein  
Germany  
Ph: 49 (0) 6781 62-0  
Fx: 49 (0) 6781 62-28  
Email: [service@tuerkis-schneid-center.de](mailto:service@tuerkis-schneid-center.de)  
Website: [www.tuerkis-schneid-center.de](http://www.tuerkis-schneid-center.de)

**OLIN BRASS MEXICO S.A. de CV**

Av. La Griega # 117  
Parque Industrial Queretaro  
Santa Rosa, Jaurgui  
Queretaro, Mexico 76220  
Ph: 52 442 2 29 40 00  
Fx: 52 442 2 29 40 29